


WILUX System DLS3102 Q

Cross web labeller



Swissness - Development and production in Switzerland

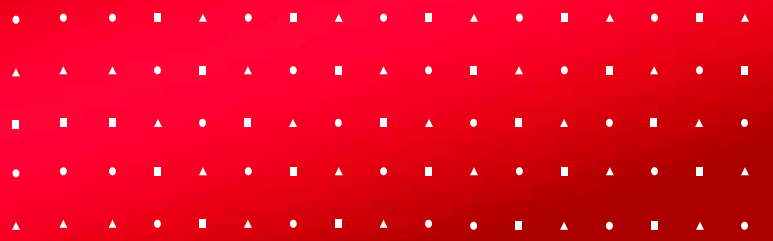

WILUX PRINT AG
Unterfeldstrasse 5
CH-8340 Hinwil

Tel.: +41 (0)55 253 24 24
Fax: +41 (0)55 253 24 25

mail@wilux.ch
www.wilux.ch
www.labellingshop.com




wilux print
swissness
Ihr Partner für Etikettier- und Kennzeichnungslösungen

Cross web labeller, optionally equipped with inline thermal transfer printer



With the WILUX DLS3102 Q system, optionally equipped with an inline thermal transfer printer, finished packages can be labelled automatically at the end of vacuum thermoforming packaging machines, from above and/or from below, in multi-lanes and multi-rows, at a standstill.

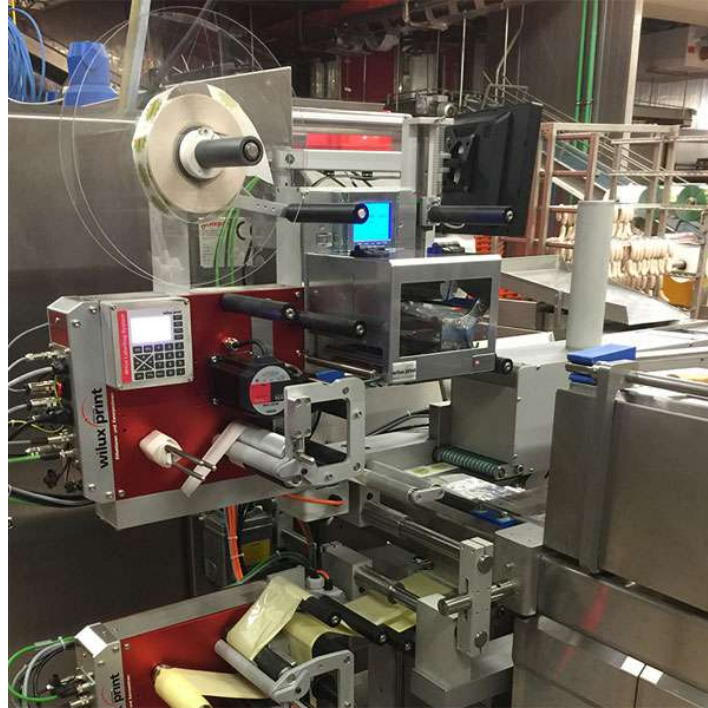

WILUX System DLS3102 Q

1	Basic module available in right or left-hand version
2	Control panel with intuitive menu navigation
3	Control electronics completely integrated in the labelling head
4	Label roll Ø: max. 360mm
5	Roller core Ø: 40/76/100mm
6	Modular expandable with inline thermal transfer

Operation functions

•	Dispensing speed
•	Input of the packaging film width
•	Input number of rows and lanes
•	Automatic calculation of the label position in a row
•	Display for monitoring the operating parameters and the general functions
•	Memory for label formats

Models	DLS3102 Q 1206	DLS3102 Q 1706
Label Bandwidth	max. 120mm	max. 170mm

WILUX PRINT AG
Unterfeldstrasse 5
CH-8340 Hinwil

Tel.: +41 (0)55 253 24 24
Fax: +41 (0)55 253 24 25

mail@wilux.ch
www.wilux.ch
www.labellingshop.com



DATAMAX A-Class Mark II

Optional inline thermal transfer printer



further technical details
see data sheet DATAMAX A-Class Mark II

Standard functions

Applicator interface port (15 pin) with programmable inputs and outputs
Graphic LCD control display with backlight
DPL, ZPL, PLI command language
Paper feed control after printing
Ribbon end pre-alarm
Start diagnosis
Diagnostic display and modes
Material counter
Integrated real-time clock
Ribbon types: coated side inside or outside
Maximum ribbon length: 650m

Barcodes / fonts / graphics

Barcodes

- Linear: Code 3 of 9, UPC-A, UPC-E, Interleaved 2 of 5, Code 128, HIBC, EAN-8, EAN-13, Codabar, Plessey, UPC 2- und 2- and 5-digit additions, Post-net, Code 93, UCC/EAN-Code 128, Telepen
- 2D symbols: MaxiCode, PDF417, USD-8, Datamatrix, QR-Code, Aztec, TLC 39, Micro PDF417

Printer-specific fonts

- Ten alphanumeric fonts from 2mm to 6mm, including OCR-A, OCR-B and the AGFA® CG Triumvirate™
- Scalable fonts: CG Triumvirate, CG Triumvirate Bold Condensed and CG Times with support for Cyrillic, Greek, Arabic and Hebrew characters

Downloadable font types

- True-Type, Bitmap

Character set

- Over 50 printer-specific character sets; Unicode/UTF8 support

Graphic support

- PCX, BMP und IMG files

Extension / rotation of fonts

- All fonts vertically and horizontally expandable up to 24 times
- Print fonts and graphics in four directions: 0°, 90°, 180° and 270°

Reversible field / mirror image

- Fonts and graphic fields can be printed as normal or inverted image

ILPC (International Language Print Capability)

- Kanji Gothic B, scalable
- Korean (Hangul)
- Chinese, simplified (GB)

Integration

Communication ports

- Standard: USB, Centronics (parallel) RS232 (DB-9) up to 38.400 Bit/s (serial), 10/100 Base-T Fast Ethernet (internal Ethernet)

Firmware

- Updates: available online
- Universal printer command languages
- (Emulation): PL-Z Zebra und PL-I Intermec

Speicher

- 8 MB Flash
- 16 MB DRAM

Models	A-4xxx	A-6xxx
Printer type	Thermal direct and thermal transfer	
Versions	Right or left-hand versions available	
Print speed	50 - 304mm/sec	50 - 254mm/sec
	Depending on the type of printer and the quality of the label material and ribbon used	
Resolution	203 - 600 dpi	203 - 300 dpi
	Depending on the printer type used	
Print width	104.0 - 105.7mm	162.6 - 167.0mm
	Depending on the printer type used	
Print length	6 - 2500mm	
Label carrier width	25 - 118mm	50 - 170mm
Communication ports	Serial + parallel port, USB, Ethernet TCP/IP	

WILUX PRINT AG
Unterfeldstrasse 5
CH-8340 Hinwil

Tel.: +41 (0)55 253 24 24
Fax: +41 (0)55 253 24 25

mail@wilux.ch
www.wilux.ch
www.labellingshop.com



wilux print
swissness
Ihr Partner für Etikettier- und Kennzeichnungslösungen

Labels and thermal transfer ribbons

Labels

WILUX is an expert in the production of multicoloured and unprinted labels in a wide range of shapes, sizes and materials, as well as in the realisation of high-quality special applications.


Trust our more than 40 years of expertise in the field of label production. We are able to offer you the right label for every product requirement.



Thermal transfer ribbons

WILUX thermal transfer ribbons are available in various qualities and colors and can be cut to length and width as desired.

To avoid electrostatic charging during the printing process and the associated damage to the print head, WILUX uses only high-quality thermal transfer ribbons.



Do you have further questions?

CONTACT US!

We will gladly advise you.

WILUX PRINT AG
Unterfeldstrasse 5
CH-8340 Hinwil

Tel.: +41 (0)55 253 24 24
Fax: +41 (0)55 253 24 25

mail@wilux.ch
www.wilux.ch
www.labellingshop.com

